

STATEMENT

I, Yoshikazu SAKA, residing at Ark Mori Building 13F, 12-32, Akasaka 1-chome, Minato-ku, Tokyo 107-6013, Japan hereby state that I have a thorough knowledge of the English and Japanese languages and that the attached documents are accurate English translations of the Japanese specifications of Japanese Patent Application Nos.2002-248786 and 2003-169620, upon which the present application claims a priority.

Declared at Tokyo, Japan

This 5th day of August, 2005



Yoshikazu SAKA

JAPAN PATENT OFFICE

This is to certify that the annexed is a true copy of the following application as filed with this office.

Date of Application: June 13, 2003

Application Number: Japanese Patent Application
No. 2003-169620
[JP2003-169620]

Applicant(s): FUJI XEROX CO., LTD.

December 4, 2003
Commissioner,
Patent Office: Yasuo IMAI

(Seal)

Issue No. 2003-3100487

[Name of Document]	Patent Application
[Reference Number]	FE03-01779
[Submission Date]	June 13, 2003
[Addressed To]	Commissioner, Patent Office, Esq.
[International Classification]	G06K 19/00
[Inventor]	
[Address or Residence]	c/o Fuji Xerox Co., Ltd., Ebina Brunch-Office, 2274, Hongo, Ebina-shi, Kanagawa
[Name]	Ryoji WATANABE
[Inventor]	
[Address or Residence]	c/o Fuji Xerox Co., Ltd., KSP R&D Business Park Building, 2-1, Sakado 3-chome, Takatsu-ku, Kawasaki-shi, Kanagawa
[Name]	Akihiko TAKADA
[Inventor]	
[Address or Residence]	c/o Fuji Xerox Co., Ltd., Ebina Brunch-Office, 2274, Hongo, Ebina-shi, Kanagawa
[Name]	Masayoshi SAKAKIBARA
[Inventor]	
[Address or Residence]	c/o Fuji Xerox Co., Ltd., Ebina Brunch-Office, 2274, Hongo, Ebina-shi, Kanagawa
[Name]	Hajime KISHIMOTO
[Inventor]	
[Address or Residence]	c/o Fuji Xerox Co., Ltd., 17-22, Akasaka 2-chome, Minato-ku, Tokyo
[Name]	Yasuo HORINO
[Inventor]	

[Address or Residence]	c/o Fuji Xerox Co., Ltd., Ebina Branch-Office, 2274, Hongo, Ebina-shi, Kanagawa	
[Name]	Toshiyuki YANO	
[Inventor]		
[Address or Residence]	c/o Fuji Xerox Co., Ltd., Ebina Branch-Office, 2274, Hongo, Ebina-shi, Kanagawa	
[Name]	Yasuhiro MATSUO	
[Applicant for Patent]		
[Identification Number]	000005496	
[Name or Appellation]	FUJI XEROX CO., LTD.	
[Agent]		
[Identification Number]	110000039	
[Name or Appellation]	IPS Patent Office	
[Representative]	Akira HAYAKAWA	
[Telephone Number]	045-228-0131	
[Priority Claimed Based on the Prior Application]		
[Application Number]	Japanese Patent Application No. 2002-248786	
[Filing Date]	August 28, 2002	
[Indication of Fee]		
[Registered Number of Prepayment]	132839	
[Amount of Payment]	21,000 yen	
[List of Attached Documents]		
[Article]	Specification	1
[Article]	Drawings	1
[Article]	Abstract	1

[General Power
of Attorney No.]

0105604

[Request for Proof]

Yes

[Name of Document] Specification

[Title of the Invention] Postprocessing apparatus and
postprocessing method

[Scope of Claim]

[Claim 1]

A postprocessing apparatus for performing a
postprocessing with respect to an image forming member
on which an image is to be formed, the postprocessing
apparatus comprising:

attachment means for attaching a storage medium to
the image forming member on which it has started to form
the image.

[Claim 2]

The postprocessing apparatus according to claim 1,
wherein:

the attachment means attaches the storage medium
after a process of transferring the image onto the image
forming medium.

[Claim 3]

The postprocessing apparatus according to claim 1
or 2, wherein:

the attachment means attaches the storage medium
after a process of fixing the transferred image onto the
image forming member.

[Claim 4]

The postprocessing apparatus according to any one
of claims 1 to 3, further comprising:

data writing means for writing data into the storage medium.

[Claim 5]

The postprocessing apparatus according to claim 4, wherein:

an image forming apparatus for forming the image on the image forming member receives an operation of inputting data; and

the data writing means writes the input data into the storage medium.

[Claim 6]

The postprocessing apparatus according to claim 4 or 5, wherein:

the data writing means writes the data into the storage medium attached to the image forming member.

[Claim 7]

The postprocessing apparatus according to any one of claims 1 to 6, wherein:

an image forming apparatus for forming the image on the image forming member receives an operation of instructing attachment of the storage medium; and

the attachment means attaches the storage medium in response to the received operation.

[Claim 8]

The postprocessing apparatus according to any one of claims 1 to 6, wherein:

an external terminal connected through a

communication line to an image forming apparatus for forming the image on the image forming member or the postprocessing apparatus, receives an operation of instructing attachment of the storage medium; and

the attachment means attaches the storage medium in response to the received operation.

[Claim 9]

The postprocessing apparatus according to any one of claims 1 to 8, wherein:

the storage medium is held by a staple needle; and

the attachment means staples the staple needle holding the storage medium to the image forming member to attach the storage medium.

[Claim 10]

The postprocessing apparatus according to claim 9, wherein:

the attachment means staples the staple needle to the single image forming member.

[Claim 11]

The postprocessing apparatus according to any one of claims 1 to 8, wherein:

the storage medium is held by an adhesive member; and

the attachment means sticks the adhesive member holding the storage medium to the image forming member to attach the storage medium.

[Claim 12]

A staple needle to be attached to a sheet-shape member,
the staple needle comprising:

storage-medium holding means for holding a storage
medium storing data.

[Claim 13]

A staple needle to be attached to a sheet-shape member,
the staple needle comprising:

data storage means for storing data.

[Claim 14]

The staple needle according to claim 12 or 13,
wherein:

at least a part of a chassis of the staple needle
serves as an antenna for transmitting/receiving or any
of transmitting/receiving the stored data, and
transmits/receives, transmits, or receives the stored
data.

[Claim 15]

A method for performing a postprocessing with
respect to an image forming member on which an image is
to be formed, the method comprising:

attaching a storage medium to the image forming
member on which it has started to form the image.

[Detailed Description of the Invention]

[0001]

[Field of the Invention]

The present invention relates to a postprocessing apparatus and a postprocessing method, which mounts a non-contact memory on an image forming member on which an image is formed.

[0002]

[Conventional Art]

For example, non-patent document 1 discloses a compact semiconductor chip (for example, "μ-chip") from which stored data can be read externally in a non-contact manner.

Also, patent document 1 to patent document 6 discloses applications of the semiconductor chip.

[0003]

[Patent Document 1]

JP-A-2001-229199

[Patent Document 2]

JP-A-2000-285203

[Patent Document 3]

JP-A-2001-134672

[Patent Document 4]

JP-A-2001-283011

[Patent Document 5]

JP-A-2001-148000

[Patent Document 6]

JP-A-2001-260580

[Non-Patent Document 1]

<http://pcweb.mycom.co.jp/news/2001/07/05/22.htm>

1

[0004]

[Problem to be solved by the Invention]

The invention has been made based on the technical background. An object of the invention is to provide a postprocessing apparatus and a postprocessing method, which can mount a semiconductor chip on an image forming member on which an image is formed.

[0005]

[Means for Solving the Problem]

[Postprocessing Apparatus]

To achieve the above described object, a postprocessing apparatus according to the invention performs a postprocessing with respect to an image forming member on which an image is to be formed. The postprocessing apparatus includes attachment means for attaching a storage medium to the image forming member on which it has started to form the image.

[0006]

Preferably, the attachment means attaches the storage medium after a process of transferring the image

onto the image forming medium.

Preferably, the attachment means attaches the storage medium after a process of fixing the transferred image onto the image forming member.

[0007]

Preferably, the postprocessing apparatus further includes data writing means for writing data into the storage medium.

[0008]

Preferably, an image forming apparatus for forming the image on the image forming member receives an operation of inputting data, and the data writing means writes the input data into the storage medium.

[0009]

Preferably, the data writing means writes the data into the storage medium attached to the image forming member.

[0010]

Preferably, an image forming apparatus for forming the image on the image forming member receives an operation of instructing attachment of the storage medium, and the attachment means attaches the storage medium in response to the received operation.

[0011]

Preferably, an external terminal connected through a communication line to an image forming apparatus for forming the image on the image forming member or the

postprocessing apparatus, receives an operation of instructing attachment of the storage medium, and the attachment means attaches the storage medium in response to the received operation.

[0012]

Preferably, the storage medium is held by a staple needle, and the attachment means staples the staple needle holding the storage medium to the image forming member to attach the storage medium.

[0013]

Preferably, the attachment means staples the staple needle to the single image forming member.

[0014]

Preferably, the storage medium is held by an adhesive member, and the attachment means sticks the adhesive member holding the storage medium to the image forming member to attach the storage medium.

[0015]

[Staple Needle]

Also, a staple needle according to the invention, to be attached to a sheet-shape member, includes storage-medium holding means for holding a storage medium storing data.

[0016]

Also, a staple needle according to the invention, to be attached to a sheet-shape member, includes data storage means for storing data.

[0017]

Preferably, at least a part of a chassis of the staple needle serves as an antenna for transmitting/receiving or any of transmitting/receiving the stored data, and transmits/receives, transmits, or receives the stored data.

[0018]

[Postprocessing Method]

Also, a method according to the invention, for performing a postprocessing with respect to an image forming member on which an image is to be formed, includes attaching a storage medium to the image forming member on which it has started to form the image.

[0019]

[Embodiment of the Invention]

[Background]

For the purpose of helping to understand the invention, the background under which the invention was made will be described.

A very small-sized semiconductor chip is attached to a paper medium, and information is stored in this semiconductor chip. Thereby, the information stored in this semiconductor chip can be supplied in addition to image information printed on the surface of the paper medium.

As a method of printing an image on a paper medium, when an electrophotographic system is employed, a transfer

process for transferring a toner image onto the paper medium and a fixing process for fixing the transferred image on the paper medium are carried out. Under these transferring/fixing processes, the paper medium is exposed to either a high temperature environment or a high voltage environment.

Heat, or high voltages adversely influence the semiconductor chip attached to a paper medium. Therefore, there is feared that this semiconductor chip may be destroyed under either high temperature or high voltage environments in the image forming process.

[0020]

In view of those background, the postprocessing method according to the invention mounts a semiconductor chip (storage medium) to a paper medium (image forming member) after an image is formed, to prevent the semiconductor chip from being destroyed by high temperature or high voltage generated by the image forming process.

[0021]

[Outline]

An outline of the invention will be explained with giving examples.

In a postprocessing method according to the invention, for example, a staple needle, which holds thereon a semiconductor chip, is stapled with respect to a paper medium on which an image has been formed to

mount the semiconductor chip thereon.

Fig. 1 (A) shows an example of a first staple needle 42a, which is used in the postprocessing method of the invention. Fig. 1 (B) shows an example of the staple needle 42a, which has been stapled.

As shown in Fig. 1 (A), the staple needle 42a is made of a "U-shaped" metal piece. This metal staple needle 42a includes a holding portion 422 (storage-medium holding means) for holding thereon an IC chip 3, projection portions 424 which are projected from the holding portion 422, and needle-shaped leg portions 426, which project from both edges of the holding portion 422 at a substantially right angle.

[0022]

When the holding portion 422 is stapled in a printing paper 40, a inner plane of the U shape is engaged with the printing paper 40. The IC chip 3 is held on a rear plane of a plane, which is engaged with the printing paper 40.

The projection portions 424 of this staple needle 42a are provided on the same plane where the IC chip 3 of the holding portion 422 is held.

The projection portions 424 are arranged in the vicinity of the both edges of the IC chip 3, and project from the IC chip 3 at a level higher than this IC chip 3.

Assuming that the holding portion 422 is set as a

reference, the leg portions 426 project along a direction opposite to the IC chip 3 and the projection portions 424.

[0023]

As shown in Fig. 1(B), when the staple needle 42a is depressed by a stapler 54, after the leg portions 426 passes through the printing paper 40, these leg portions 426 abut against a needle receiving base 58 and then are bent.

Since the projection portion 424 project at the higher level from the IC chip 3, when the staple needle 42a is depressed, the projection portions 424 prevent the IC chip 3 from being depressed by the stapler 54.

A portion of the staple needle 42a may function as an antenna when the IC chip 3 transmits/receives data.

[0024]

Fig. 2 is a diagram showing an example of the printing paper 40 to which the staple needle 42a (Fig. 1) is attached.

As shown in Fig. 2, the staple needle 42a is attached to the printing paper 40 (image forming member) on which an original image is printed.

The IC chip 3 (Fig. 2) is held on the staple needle 42a. This printing paper 40 can provide information stored in the IC chip 3 in addition to the original image printed thereon.

As described above, the postprocessing method

according to the invention staples the staple needle 42a on the printing paper 40 after the image is printed thereon. Thereby, the IC chip 3 is added to the printing paper 40.

[0025]

[Embodiment]

An embodiment of a postprocessing method according to the present invention will now be described more in detail with reference to a specific example.

Fig. 3 is a diagram showing a hardware structure of a copying apparatus to which a postprocessing method according to the present invention is applied with mainly focusing on a control apparatus.

As shown in Fig. 3, the copying apparatus 1 includes the control apparatus 2 for controlling an entirety of the copying apparatus 1, a printing unit 10 for forming an image, and a postprocessing unit 50 for performing a postprocessing such as a staple process.

The printing unit 10 prints an image on the printing paper 40 by using an electrophotographic system.

The postprocessing unit 50 staples the staple needle 42a on, for example, the printing paper 40.

The control apparatus 2 includes a control apparatus main body 20, a communication apparatus 22, a recording apparatus 24 such as an HDD/CD apparatus, a user interface apparatus (UI apparatus) 26, and an IC chip interface (IC chip IF) 28 (data writing means). The control

apparatus main body 20 contains a CPU 202, a memory 204, and the like. The user interface apparatus 26 contains either an LCD display apparatus or a CRT display apparatus, and a keyboard/touch panel, and so on. The IC chip interface 28 contains an antenna 280.

[0026]

[Copying Apparatus 1]

Fig. 4 is a diagram for exemplifying a hardware structure of the copying apparatus shown in Fig. 3 with mainly focusing on both a printing unit thereof and the postprocessing unit.

As shown in Fig. 4, the printing unit 10 includes a paper tray part 12, a print engine 14, a fixing roller 15, a pressure roller 16, a scanner 17, an original feeding apparatus 18, and so on. The print engine 14 forms a toner image on the printing paper 40. The fixing roller 15 heats the toner image formed on the printing paper 40 to fix the heated toner image. The pressure roller 16 depresses the printing paper 40 along a direction of the fixing roller 15. The scanner 17 reads an image of an original. The original feeding apparatus 18 feeds the original.

[0027]

The postprocessing unit 50 includes a compile tray 52, a stapler 54 (attachment means), a cam 56, a needle receiving base 58, and the like. The compile tray 52 stores thereinto the printing paper 40 transported from the printing unit 10. The stapler 54 staples the staple

needle 42a (Fig. 1) to the printing paper 40 stored in the compile tray 52. The cam 56 rotates an eccentric shaft so as to depress the stapler 54. The needle receiving base 58 receives the staple needle 42a and bends this received staple needle 42a.

Also, the IC chip IF 28 and the antenna 280 are arranged in the vicinity of a transport path through which the printing paper 40 is transported, which is postprocessed in the postprocessing unit 50. The UI apparatus 26 is arranged at an upper portion of the printing unit 10.

In other words, the copying apparatus 1 employs a hardware structure that the IC chip IF 28 and the antenna 280 are added to a general-purpose copying apparatus in which an image of an original is read to be printed on the printing paper 40 and then, the image-printed printing paper 40 is postprocessed by way of a staple process.

As shown in Fig. 4, the control apparatus 2 (Fig. 3) is actually stored into the printing unit 10, and the IC chip IF 28 and the antenna 280 (Fig. 3) are stored into the postprocessing unit 50.

[0028]

[IC Chip 3/IC Chip IF 28]

Fig. 5 is a diagram schematically showing a structure of the IC chip 3 shown in Fig. 1(A).

Fig. 6 is a diagram schematically showing a structure of the IC chip IF 28 shown in Figs. 3 and 4.

As shown in Fig. 5, the IC chip 3 includes a clock reproducing circuit 320, a memory circuit 322, a data transmitting/receiving circuit 324, and a power supply circuit 326.

[0029]

Also, as shown in Fig. 6, the IC chip IF 28 includes a transmitting circuit 284, a receiving circuit 286, a transmission/reception control circuit 282, a demodulating circuit 288, and a modulating circuit 290.

In accordance with the below-mentioned operations of each constituent component of the IC chip 3 and the IC chip IF 28, information (data), which is stored in the IC chip 3, is read therefrom via the IC chip IF 28 in a non-contact manner.

[0030]

In the IC chip 3 (see Fig. 5), the power supply circuit 326 rectifies an electromagnetic wave signal supplied via the staple needle 42a (Fig. 1 and Fig. 5) to supply electric power to each constituent component of the IC chip 3, while this electric power is required for the constituent components.

[0031]

The clock reproducing circuit 320 reproduces a clock signal from the electromagnetic wave signal supplied from via the staple needle 42a (Fig. 1 and Fig. 5) from the IC chip IF 28 and then, outputs this reproduced clock signal to the memory circuit 322 and the data

transmitting/receiving circuit 324.

[0032]

The memory circuit 324 is, for example, a nonvolatile RAM (random access memory). This memory circuit 324 stores therein data indicating information, which is input from the data transmitting/receiving circuit 324 in synchronization with the clock signal input from the clock reproducing circuit 320.

Also, the memory circuit 322 outputs data indicating information stored therein to the data transmitting/receiving circuit 324 in synchronization with the clock signal.

[0033]

The data transmitting/receiving circuit 324 demodulates the electromagnetic wave signal input via the staple needle 42a (Figs. 1 and 5) into data and then, outputs this demodulated data to the memory circuit 322 in synchronization with the clock signal input from the clock reproducing circuit 320.

Also, the data transmitting/receiving circuit 324 changes a reflection intensity of an electromagnetic wave signal supplied from the IC chip IF 28 in accordance with a value of data input from the memory circuit 322 in synchronization with the clock signal.

As described above, the data indicating the information, which is stored in the memory circuit 322, is transmitted from the IC chip 3 to the IC chip IF 28

by changing the intensity of the reflection signal of the electromagnetic wave signal transmitted from the IC chip IF 28 to the IC chip 3.

[0034]

In the IC chip IF 28 (Fig. 6), the transmission/reception control circuit 282 controls an operation of each constituent component of the IC chip IF 28.

Also, this transmission/reception control circuit 282 outputs data input from the control apparatus main body 20 (printing program 7, which will be discussed later with reference to Fig. 7) to the modulating circuit 290.

Further, this transmission/reception control circuit 282 outputs data, which has been received by the reception circuit 286 and then has been demodulated by the demodulating circuit 288, to the control apparatus main body 20.

[0035]

The modulating circuit 290 modulates a high frequency signal (radio frequency signal) based on data input from the transmission/reception control circuit 282 to produce an electromagnetic wave signal and then, outputs this produced electromagnetic wave signal to the transmitting circuit 284.

[0036]

The transmitting circuit 284 transmits the electromagnetic wave signal via the antenna 280 to the

IC chip 3. This electromagnetic wave signal contains data to be stored in the IC chip 3, and the clock signal.

[0037]

The receiving circuit 296 receives a reflection signal, which is reflected from the IC chip 3, and then outputs this received reflection signal to the demodulating circuit 288.

[0038]

The modulating circuit 288 demodulates the data transmitted from the IC chip 3 based on a change of the reflection signal input from the receiving circuit 286, and then outputs the demodulated data to the transmission/reception control circuit 282.

[0039]

[Printing Program 7]

Fig. 7 is a block diagram for schematically showing a structure of a printing program 7, which is executed by the control apparatus 2 (see Figs. 3 and 4) to realize the postprocessing method according to the invention.

As shown in Fig. 7, the printing program 7 includes an image reading section 700, an UI section 710, a printing section 720, an IC chip attaching section 730, and a data writing section 740.

The printing program 7 is supplied via, for instance, the recording medium 240 (Fig. 3) to the control apparatus 2, and then is loaded to the memory 204 so as to be executed.

[0040]

In the print program 7, the image reading section 700 controls the constituent components of the printing unit 10 such as the scanner 17 (Fig. 4) to read an original image displayed on an original.

[0041]

The UI section 710 receives an operation of a user with respect to the UI apparatus 26 (Figs. 3 and 4), and outputs data for instructing mounting of the IC chip 3 to the IC chip attaching section 730.

Also, the UI section 710 receives an operation of the user with respect to the UI apparatus 26, and outputs data, which is to be written into the IC chip 3, to the data writing section 740.

[0042]

When data of an original image is input from the image reading section 700, the printing section 720 controls each constituent component of the printing unit 10 such as the print engine 14 (Fig. 4) to print the original image on the printing paper 40.

[0043]

When the IC chip attaching section 730 is instructed to mount the IC chip 3 from the UI section 710, this IC chip attaching section 730 controls the stapler 54 (Fig. 4) so that this stapler 54 staples the staple needle 42a (Fig. 1) on the printing paper 40 on which the original image is printed.

[0044]

When data is input from the UI section 710 to the data writing section 740, this data writing section 740 controls the IC chip IF 28 (Figs. 3 and 4) to write this input data into the IC chip 3 attached to the printing paper 40.

[0045]

[Overall Operation]

Next, overall operation of the copying apparatus 1 will be described.

Fig. 8 is a flow chart for describing an operation (S10) of the copying apparatus 1 (printing program 7).

As shown in Fig. 8, in a step 100 (S100), a user performs an operation for instructing a commencement of a printing operation with respect to the UI apparatus 26 (Figs. 3 and 4).

Upon receipt of this operation, the UI section 710 (Fig. 7) outputs data for instructing the commencement of the printing operation to the image reading section 700 and the like.

[0046]

In a step 102, when the operation of the commencement of the printing operation is carried out with respect to the UI apparatus 26 (Figs. 3 and 4), the image reading section 700 controls the scanner 17 (Fig. 4) and the like to read an original image displayed on an original.

[0047]

In a step 104 (S104), the printing section 720 (Fig.

7) controls the print engine 14 (Fig. 4) so that a toner image of the read original image is formed on a drum (not shown), and then, the formed toner image is transferred onto the printing paper 40.

[0048]

In a step 106 (S106), the printing section 720 (Fig. 7) controls the fixing roller 15 (Fig. 4) and the pressure roller 16 (Fig. 4) to heat the toner image on the printing paper 40 and to fix the transferred toner image onto the printing paper 40.

The printing paper 40 on which the toner image is fixed is transported to the postprocessing unit 50 (Fig. 4) to be stored in the compile tray 52 (Fig. 4).

[0049]

In a step 108 (S108), the printing program 7 (Fig. 7) judges as to whether or not a designated sheet of printing operation has been completed.

When the printing program 7 judges that the designated sheet of printing operation has been completed, the process is advanced to another process of a step S110, whereas in other cases than the above-explained case, the processes from the step S102 to the step S106 are repeatedly carried out.

[0050]

For example, when the user merely performs to commence a printing operation with respect to the UI apparatus 26 (Figs. 3 and 4), the copying apparatus 1

executes a simple copying process operation.

In contrast to this operation, when the user performs to commence the printing operation after the user has instructed the UI apparatus 26 to attach the IC chip 3, the copying apparatus 1 executes the postprocessing operation according to the present invention.

In the step 110 (S110), the UI section 710 (Fig. 7) judges whether the user simply performs the operation for the copying operation, or instructs to attach the IC chip 3.

When the user executes the former operation (copying operation), the printing program 7 is advanced to a process of a step S116, whereas in other cases than the above-described case, the printing program 7 is advanced to another process operation of a step S112.

[0051]

In the step 112 (S112), the IC chip attaching section 730 (Fig. 7) controls the stapler 54 (Fig. 4) and the like to staple the staple needle 42a on which the IC chip 3 is held to the printing paper 40 stored in the compile tray 54.

Even when total sheet of printing paper 40 stored in the compile tray 54 is one sheet, the IC chip attaching section 730 staples the staple needle 42a on one sheet of this printing paper 40.

[0052]

In a step 114 (S114), the data writing section 740

(Fig. 7) controls the IC chip IF 28 (Fig. 4) to write data into the IC chip 3 attached to the printing paper 40.

When the data writing operation is completed, the postprocessing unit 50 (Fig. 4) transports and discharges the printing paper 40, and the process operation is ended.
[0053]

In a step 116 (S116), the postprocessing unit 50 executes the normal postprocessing operation, for example, punching or stapling operation with respect to the printing paper 40, and then, the process operation is terminated.

When attaching of the IC chip 3 is not instructed, the postprocessing unit 50 prohibits the stapling process operation when one sheet of printing paper 40 is stored in the compile tray 54.

[0054]

As described above, after the process operations executed under high temperature/high voltage environments in the printing operation have been completed, the copying apparatus 1 staples the staple needle 42a on which the IC chip 3 is held on the printing paper 40.
[0055]

[Modifications of Staple Needle]

It should also be noted that if a staple needle holds the IC chip 3 and can be protected in such a manner that this staple needle is not depressed by a stapler 54 (Fig.

1(B)), this staple may be made of other shapes than the above-described shape of the staple needle 42a.

Modifications of the staple needle 42a will now be explained below.

[0056]

First, a second staple needle 42b will now be explained.

Fig. 9(A) shows an outer appearance when a second staple needle 42b is viewed from an oblique direction, and Fig. 9(B) is a diagram for explaining a sectional view of the second staple needle 42b indicated in (A) taken along a two-dot/dash line thereof.

As shown in Fig. 9A, the second staple needle 42b includes a plate-shaped holding portion 422 and needle-shaped leg portions 426.

The holding portion 422 has a plate shape in which a plane depressed by the stapler 54 is larger than an adjacent plane thereto. The holding portion 422 defines an opening portion, which open toward a direction depressed by the stapler 54.

As described above, since the IC chip 3 is stored in the opening portion of the second staple needle 42b, when the stapler 54 (Fig. 1(B)) staples this second staple needle 42b, the IC chip 3 is protected in the housing of the second staple needle 42b, and thus, is not depressed.

The leg portions 426 of the second staple needle 42b are essentially same as those of the first staple

needle 42a.

[0057]

As shown in Fig. 9B, the holding portion 422 has a thickness thicker than that of the IC chip 3 to prevent the IC chip 3 from being depressed by the stapler 54.

Also, the opening portion formed in the holding portion 422 is opened more largely as approaching to a plane, which is engaged with the printing paper 40. The IC chip 3 has the substantially same shape as the shape of the opening portion of the holding portion 422.

As a result, the IC chip 3 held in the opening portion does not pass through the opening portion in a rear direction of the plane engaging with the printing paper 40. When the staple needle 42b is stapled to the printing paper 40, the IC chip 3 is held by the printing paper 40 and the holding portion 422 and thus is unddisconnectable.

[0058]

As described above, the construction in which the opening portion is formed in the second staple needle 42b and the IC chip 3 is stored in this opening portion is suitable for a case that the IC chip 3 is weak against pressure.

[0059]

Next, a third staple needle 42c will now be explained.

Fig. 10(A) illustratively shows an outer appearance of this third staple needle 42c viewed from an oblique

direction. Fig. 10(B) is an explanatory diagram showing a sectional view of the third staple needle 42c shown in Fig. 10(A) taken along a two-dot/dash line.

As shown in Fig. 10(A), the third staple needle 42c includes a plate-shaped holding portion 422 and plate-shaped leg portions 427.

The leg portions 427 are provided in such a manner that these leg portions 427 are located on both ends of the holding portion 422 at a substantially right angle with respect to this holding portion 422.

The plate-shaped holding portion 422 of this third staple needle 42c is essentially same as that of the second staple needle 42b except for a shape of an opening thereof.
[0060]

As shown in Fig. 10(B), the opening portion of this third staple needle 42c is an opening having the substantially same sizes from a plane of this opening portion engaging with the printing paper 40 to a rear plane thereof.

The leg portions 427 are made in a thin-plate shape in such a manner that these leg portions 427 can pass through the printing paper 40.

Also, the leg portions 427 are made thin in such a degree that when the leg portions 427 abut against the needle receiving base 58, it is bent.

Since this third staple needle 42c may be constituted in such a manner that even after this third staple needle

42c has been stapled on the printing paper 40, the IC chip 3 can be detachably mounted on this third staple needle 42c. This third staple 42c is suitable for such a case that this IC chip 3 is desired to be replaced with other IC chips several times.

[0061]

Next, a fourth staple needle 42d will now be explained.

Fig. 11(A) illustratively shows an outer appearance of the fourth staple needle 42d viewed from an oblique direction.

Fig. 11(B) is an explanatory diagram showing a sectional view of the fourth staple needle 42d shown in Fig. 11(A) taken along a two-dot/dash line.

As shown in Fig. 11(A), the fourth staple needle 42d includes a plate-shaped holding portion 422 and folded needle-shaped leg portions 428.

The holding portion 422 has a thinner hexagonal-cylinder shape. The leg portions 428 are connected to side surfaces of this hexagonal cylinder.

The leg portions 428 each has a needle shape, which is bent at a substantially right angle. The respective two leg portions 428 are elongated in opposite directions to each other from the side surface of the holding portion 422, and also are folded in the same direction.

[0062]

As shown in Fig. 11(B), the fourth staple needle

42d has an opening portion a dimension of which is gradually increased as approaching from a plane thereof engaging with the printing paper 40 to a rear plane thereof.

Since this fourth staple needle 42d holds the IC chip 3 in the opening portion, even after this fourth staple needle 42d has been stapled on the printing paper 40, the IC chip 3 may be more easily and detachably mounted in this opening portion.

Also, since the holding portion 422 of this fourth staple needle 42d is made smaller, when this fourth staple needle 42d is stapled in the printing paper 40, the fourth staple needle 42d can be hardly and visibly recognized.
[0063]

Next, a description will be given on a fifth staple needle 42e.

Fig. 12(A) shows an outer appearance of the fifth staple needle 42e viewed from an oblique direction. Fig. 12(B) is a diagram showing the fifth staple needle 42e shown in Fig. 12(A) as viewed from an arrow "X" direction.

As shown in Fig. 12(A), this fifth staple needle 42e includes a plate-shaped holding portion 422 and plate-shaped leg portions 427.

The holding portion 422 is folded in such a manner that a concave portion is formed in a depression plane (upper plane in this drawing). An IC chip 3 is held in this concave portion.

The plate-shaped leg portions 427 are made

substantially same as those shown in Fig. 10.

[0064]

As shown in Fig. 12(B), in the fifth staple needle 42e of this modified example, the IC chip 3 is fixed into an upper plane of this concave portion of the holding portion 422 with an adhesive.

As a consequence, even after this fifth staple needle 42e has been stapled on the printing paper 40, the IC chip 3 can be attached to this fifth staple needle 48.

Also, since this fifth staple needle 42e can be manufactured by bending one sheet of a plate-shaped member, higher productivity thereof may be realized.

[0065]

Next, a description will be given on a sixth staple needle 42f.

Fig. 13(A) illustratively shows an outer appearance of the sixth staple needle 42f viewed from an oblique direction. Fig. 13(B) is a diagram showing the sixth staple needle 42f shown in Fig. 13(A) as viewed from an arrow "X" direction.

As shown in Fig. 13(A), this sixth staple needle 42f includes a plate-shaped holding portion 422 and plate-shaped leg portions 427.

The holding portion 422 and the leg portions 427 are plate-shaped members, and are located substantially perpendicular to each other.

[0066]

As shown in Fig. 13(B), this sixth staple needle 42f holds an IC chip 3 on a rear plane of a depression plane of the holding portion 422. The IC chip 3 of this modified example is held in the vicinity of an edge portion of the rear plane (lower portion in this drawing) of the holding portion 422, that is, this IC chip 3 is held in the vicinity of one of these two leg portions 427.

As a result, when the IC chip 3 is attached to the sixth staple needle 42f and then this sixth staple needle 42f is stapled on the printing paper 40, this IC chip 3 may be invisible.

Also, since this sixth staple needle 42f may be manufactured by folding one sheet of a plate-shaped member, higher productivity thereof can be achieved.

[0067]

Next, a description will be given on a seventh staple needle 42g.

Fig. 14(A) illustratively shows an outer appearance of the seventh staple needle 42g viewed from an oblique direction. Fig. 14(B) is a diagram showing the seventh staple needle 42g shown in Fig. 14(A) as viewed from an arrow "X" direction.

As shown in Fig. 14(A), this seventh staple needle 42g includes a holding portion 423, the depression plane of which is folded in a step manner, and plate-shaped leg portions 427.

The holding portion 423 has a shape, which is folded

in the step manner and is located above a depression plane (upper plane shown in the drawing). Since this shape folded in the step manner is folded along a short axial direction of the holding portion 423, this folded-shaped holding portion 423 can be hardly bent in a long axial direction.

The leg portions 427 are substantially identical to those shown in Fig. 10.

[0068]

As shown in Fig. 14(B), since the seventh staple needle 42g of this modified example may be constructed in such a manner that this staple needle 42g can be hardly bent in the long axial direction of the holding portion 423, it is possible to avoid that the IC chip 3 is destroyed due to bending of the holding portion 423.

[0069]

The first staple needle 42 (Fig. 1) may be formed by cutting a long wire-shaped material every stapling operation. Similarly, the third staple needle 46 (Fig. 10), the fifth staple needle 42e (Fig. 12), and the sixth staple needle 42f (Fig. 13) may be formed by cutting a long plate-shaped material every stapling operation.

In these cases, while either a wire-shaped material or a plate-shaped material is employed into which IC chips 3 have been previously embedded in a predetermined interval, the copying apparatus 1 may form the staple needle 42. Also, after the staple needle 42 has been

stapled on the printing paper 40, the copying apparatus 1 may attach the IC chip 3 to this staple needle 42.

[0070]

[Adhesive Tape]

The embodiments in which the IC chips 3 are held in the staple needles have been described. The IC chip 3 may be held on an adhesive tape and this adhesive tape may be stuck to the printing paper 40.

[0064]

Fig. 15 is a diagram showing an example of an adhesive tape 53, which holds thereon an IC chip 3.

As shown in Fig. 15, the adhesive tape 53 (adhesive member) includes an adhesive plane having an adhesive characteristic, and a non-adhesive plane having no adhesive characteristic. The IC chip 3 is held on this adhesive plane of the adhesive tape 53.

The adhesive tape 53 is cut out at positions indicated by broken lines, and then, the cut adhesive tapes 53 are stuck to the printing paper 40.

[0072]

Fig. 16 is a diagram showing a second copying apparatus 102, which mounts the IC chip 3 by utilizing the adhesive tape 53 (Fig. 15).

As shown in Fig. 16, this second copying apparatus 102 includes a second postprocessing unit 502.

Constituent components of the second copying apparatus 102, which are substantially same as those of

the first copying apparatus 1, are allotted the same reference numerals.

[0073]

The postprocessing unit 502 includes the adhesive tape 53 on which the IC chip 3 is held, a punch 55, and a cam 56, and the like. The punch 55 sticks the adhesive tape 53 to the printing paper 40. The cam 56 rotates an eccentric shaft to move the punch 55 in upper/lower directions.

The punch 55 is always urged in the lower direction by force exerted from a spring.

When the cam 56 is rotated to push up the punch 55, the punch 55 may push up the adhesive tape 53, which is bridged in an upper direction, and then punches a portion of the adhesive tape 53 where the IC chip 3 is held, and thereafter sticks the punched adhesive tape to a rear surface of a plane of the printing paper 40 on which an image is formed.

[0074]

Fig. 17 is a flow chart for describing an operation (step S12) of the second copying apparatus 102 (printing program 7) with employment of the adhesive tape 53.

Steps of Fig. 17, which are substantially same as those of Fig. 8, are allotted the same reference numerals.

In the processing of this second copying apparatus 102, when it is so judged that an instruction of attaching the IC chip 3 is issued in a process of a step S110, the

IC chip attaching section 730 (Fig. 7) controls the punch 55 (Fig. 16) and the like to adhere the adhesive tape 53 on which the IC chip 3 is held to the printing paper 40 in a process of a step 116 (S116).

[0075]

As described above, the second copying apparatus 102 can attach the IC chip 3 to the printing paper 40 by employing the adhesive tape 53.

[0076]

[Network Printer]

The copying apparatus 1 receives the operation of the user via the UI apparatus 26 (Figs. 3 and 4) of this copying apparatus 1, so that this copying apparatus 1 attaches the IC chip 3 and also writes the data into this IC chip 3. Alternatively, the copying apparatus 1 may receive an instruction via a network from a computer terminal connected to this copying apparatus 1, so that this copying apparatus 1 may attach the IC chip 3 and write data into this IC chip 3.

[0077]

Fig. 18 is a diagram showing a network structure of the copying apparatus 1, which shared by a plurality of computer terminals.

The copying apparatus 1 is connected via a network 220 such as a LAN (Local Area Network) to a computer terminal 82, another computer terminal 84, still another computer terminal 86, and a server terminal 90.

The copying apparatus 1 is a composite machine equipped with a copy function and a printer function. The copy apparatus 1 prints image data received from the computer terminal 82.

Also, in response to an input operation for the computer terminals 82, the copying apparatus 1 controls the postprocessing unit 50 (Fig. 4) to attach the IC chip 3.

Furthermore, the copying apparatus 1 receives data, which is input from the computer terminal 82 and the like, via the network 220 and then, writes the received data into the IC chip 3.

[0078]

As described above, since this copying apparatus 1 attaches the IC chip 3 and writes data into this attached IC chip 3 in response to the instruction issued from the computer terminal 82 and the like, the user can perform various operations by instructing with respect to the computer terminals only one time. These various operations may include a transmission of print data, a printing instruction, attaching of the IC chip 3, a transmission of data to be written into the IC chip 3, and a data writing instruction to the IC chip 3.

[0079]

Alternatively, in response to data (e.g., data ID) read out from the IC chip 3, the copying apparatus 1 may acquire image data from the server terminal 90 to print

the acquired image data.

Concretely speaking, the computer terminal 82 (Fig. 18) transmits the image data to the copying apparatus 1, and also, instructs this copying apparatus 1 to attach the IC chip 3.

The copying apparatus 1 prints the image data received from the computer terminal 82 on the printing paper 40, and then, attaches the IC chip 3 to this printing paper 40. Furthermore, the copying apparatus 1 records the received image on the server terminal 90, and writes recording position information (for example, data ID capable of discriminating image data) of the image data into this IC chip 3.

[0080]

Subsequently, when the copying apparatus 1 copies this printing paper 40, the copying apparatus 1 reads the data ID from the IC chip 3 attached to this printing paper 40, and then acquires the image data corresponding to this read data ID from the server terminal 90 to print this acquired image data on the printing paper 40.

As described above, since the image data is recorded in the server terminal 90, it is possible to prevent deteriorations of image qualities, which are caused by repeatedly performing the copying operation, and also possible to suppress a size of data which is written into the IC chip 3.

It should also be noted that as the recording

positional information of the image data, identification information (URL, IP address etc.) of the server terminal 90 may be written into the IC chip 3 in addition to the data ID.

[0081]

[Advantage of the Invention]

As described above in detail, in accordance with the postprocessing apparatus and the postprocessing method of the present invention, the semiconductor chip can be mounted on the image forming member where the image is to be formed.

[Brief Description of the Drawings]

[Fig. 1]

(A) is a diagram for exemplifying a first staple needle employed in a postprocessing method of the present invention, and (B) is a diagram for exemplifying the staple needle which has been stapled.

[Fig. 2]

Fig. 2 is a diagram for exemplifying a printing paper to which the staple needle (Fig. 1) has been attached.

[Fig. 3]

Fig. 3 is a diagram showing a hardware structure of a copying apparatus to which a postprocessing method according to the present invention is applied with mainly focusing on a control apparatus.

[Fig. 4]

Fig. 4 is a diagram for exemplifying a hardware

structure of the copying apparatus shown in Fig. 3 with mainly focusing on both a printing unit thereof and the postprocessing unit.

[Fig. 5]

Fig. 5 is a diagram showing a structure of an IC chip shown in Fig. 1(A).

[Fig. 6]

Fig. 6 is a diagram showing a structure of an IC chip IF shown in Fig. 3 and Fig. 4.

[Fig. 7]

Fig. 7 is a diagram showing a configuration of a printing program, which is executed by the control apparatus (Fig. 3 and Fig. 4) so as to realize the postprocessing method according to the present invention.

[Fig. 8]

Fig. 8 is a flow chart for describing operations (S10) of the copying apparatus (printing program).

[Fig. 9]

(A) shows an outer appearance when a second staple needle 42b is viewed from an oblique direction, and (B) is a diagram for explaining a sectional view of the second staple needle 42b indicated in (A) taken along a two-dot/dash line thereof.

[Fig. 10]

(A) shows an outer appearance when a third staple needle 42c is viewed from an oblique direction, and (B) is a diagram for explaining a sectional view of the third

staple needle 42c indicated in Fig. 10(A) taken along a two-dot/dash line thereof.

[Fig. 11]

(A) shows an outer appearance when a fourth staple needle 42d is viewed from an oblique direction, and (B) is a diagram for explaining a sectional view of the fourth staple needle 42d indicated in Fig. 11(A) taken along a two-dot/dash line thereof.

[Fig. 12]

Fig. 12(A) shows an outer appearance of the fifth staple needle 42e viewed from an oblique direction. Fig. 12(B) is a diagram showing the fifth staple needle 42e shown in Fig. 12(A) as viewed from an arrow "X" direction.

[Fig. 13]

Fig. 13(A) illustratively shows an outer appearance of the sixth staple needle 42f viewed from an oblique direction. Fig. 13(B) is a diagram showing the sixth staple needle 42f shown in Fig. 13(A) as viewed from an arrow "X" direction.

[Fig. 14]

Fig. 14(A) illustratively shows an outer appearance of the seventh staple needle 42g viewed from an oblique direction. Fig. 14(B) is a diagram showing the seventh staple needle 42g shown in Fig. 14(A) as viewed from an arrow "X" direction.

[Fig. 15]

Fig. 15 is a diagram showing an adhesive tape holding

an IC chip.

[Fig. 16]

Fig. 16 is a diagram showing a second copying apparatus for attaching an IC chip 3 with using an adhesive tape (Fig. 15).

[Fig. 17]

Fig. 17 is a flow chart showing an operation (S12) of a copying apparatus (printing program), which uses an adhesive tape.

[Fig. 18]

Fig. 18 is a diagram showing a network structure of the copying apparatus, which is shared by a plurality of computer terminals.

[Description of Reference Numerals]

- 1, 102 copying apparatus
- 10 print unit
- 12 paper tray part
- 14 print engine
- 15 fixing roller
- 16 pressure roller
- 17 scanner
- 18 original feeding apparatus
- 2 control apparatus
- 20 control apparatus main body
- 202 CPU
- 204 memory
- 22 communication apparatus

220 network
24 recording apparatus
240 recording medium
26 UI apparatus
28 IC chip IF
280 antenna
7 printing program
700 image reading section
710 UI section
720 printing section
730 IC chip attaching section
740 data writing section
50, 502 postprocessing section
52 compile tray
53 adhesive tape
54 stapler
55 punch
56 cam
58 needle receiving base
40 printing paper
3 IC chip
320 clock reproducing circuit
322 memory circuit
324 data transmitting/receiving circuit
326 power supply circuit
42 staple needle
422 holding portion

Japanese Patent Application No.2003-169620

424 protrusion portion

426, 427, 428 leg portions

[Name of Document] Abstract

[Abstract]

[Object] Mount a semiconductor chip on an image forming member on which an image is to be formed.

[Solving Means]

A printing unit 10 of a copying apparatus 1 forms an image on a printing paper 40 by way of an electrophotographing system in response to an operation executed with respect to a UI apparatus 26. A postprocessing unit 50 of the copying apparatus 1 staples a staple needle 42a holding an IC chip 3 to the printing paper 40 on which the image has been formed, and writes data input from the UI apparatus 26 into the IC chip 3 held by the staple needle 42a.

[Selected Drawing] Fig. 1

Name of Document
~~【書類名】~~ ~~図面~~
~~【図1】~~ Drawing.

FIG. 1

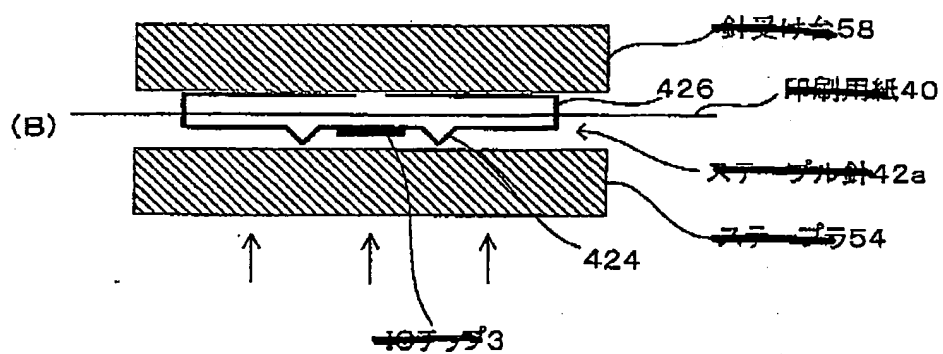
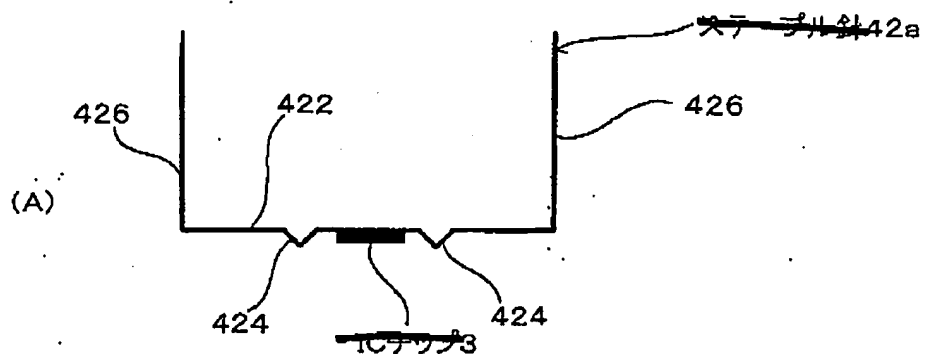


FIG. 1

(A)

3 IC chip

42a staple needle

(B)

3 IC chip

40 printing paper

42a staple needle

54 stapler

58 needle receiving base

~~【図2】~~

FIG. 2


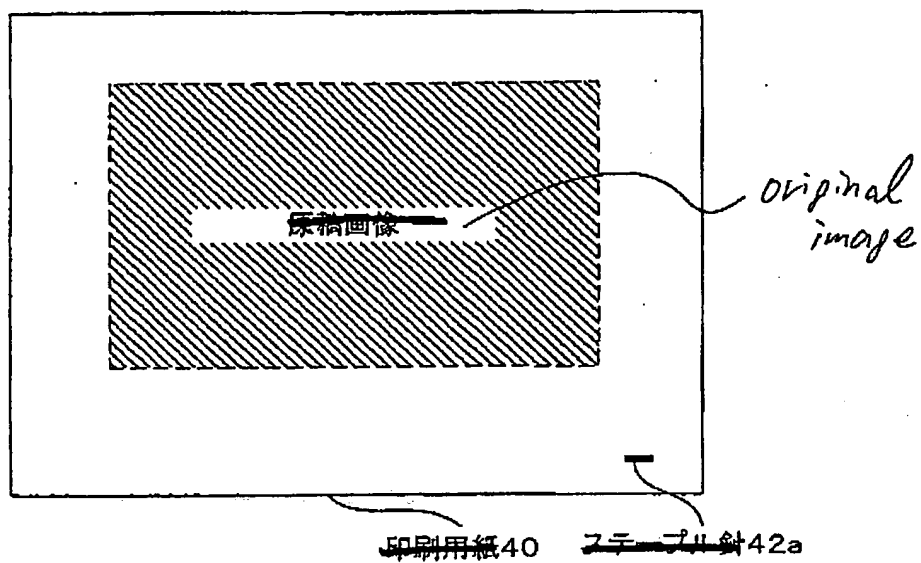


FIG. 2

40 printing paper

42 staple needle

FIG. 3

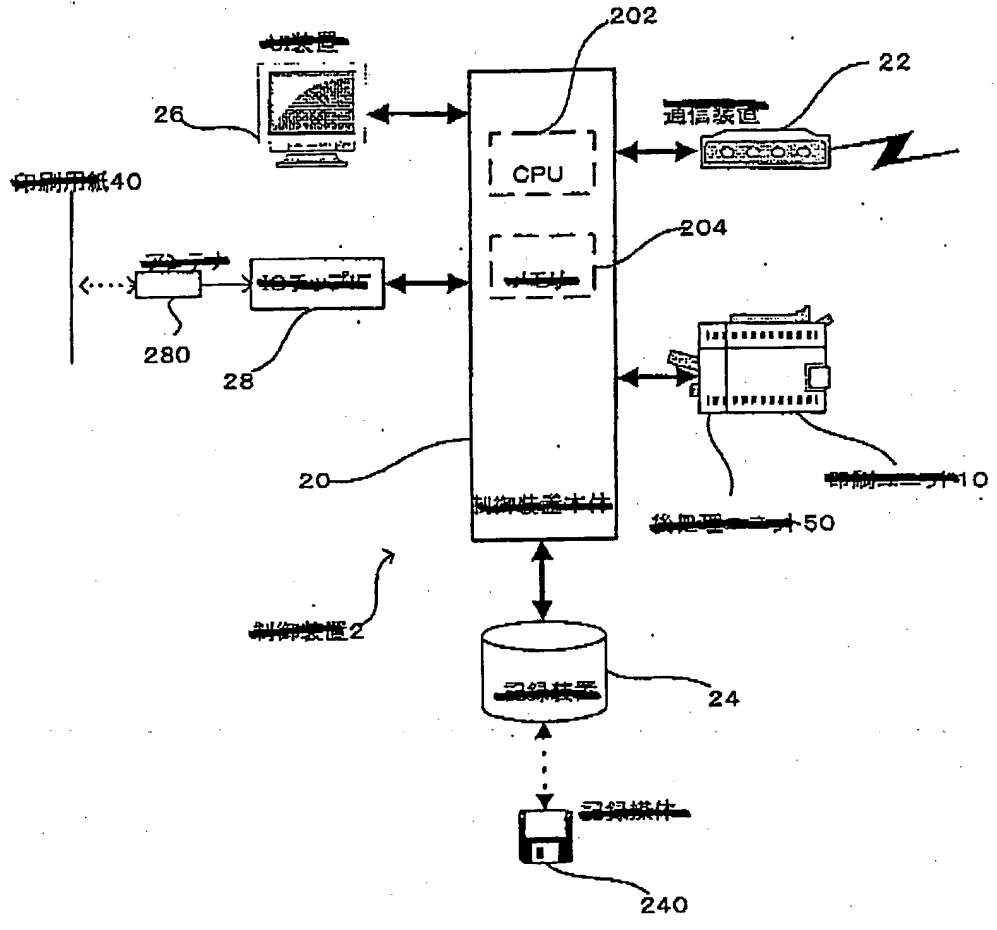

装置 1

FIG. 3

- 1 copying apparatus
- 2 control apparatus
- 10 print unit
- 20 control apparatus main body
- 22 communication apparatus
- 24 recording apparatus
- 26 UI apparatus
- 28 IC chip IF
- 40 printing paper
- 50 postprocessing unit
- 204 memory
- 240 recording medium
- 280 antenna

FIG. 4

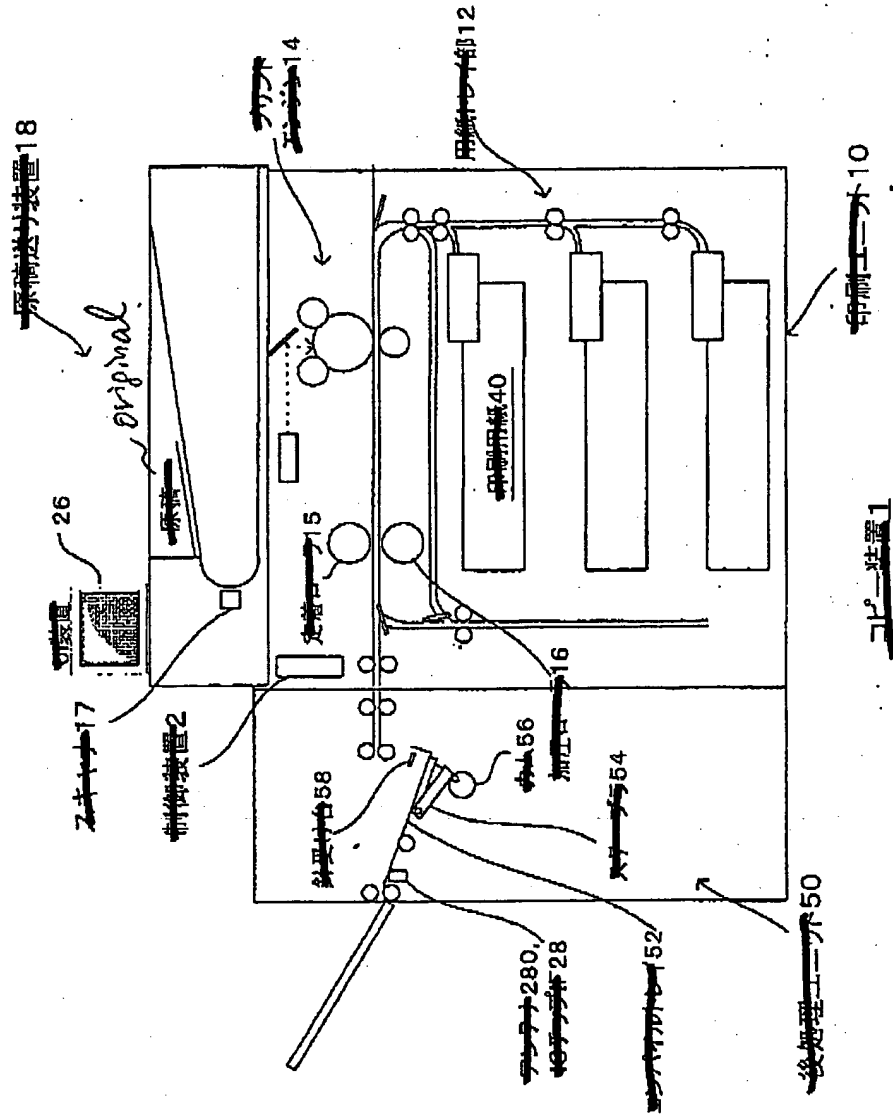


FIG. 4

- 1 copying apparatus
- 2 control apparatus
- 10 print unit
- 12 paper tray part
- 14 print engine
- 15 fixing roller
- 16 pressure roller
- 17 scanner
- 18 original feeding apparatus
- 26 UI apparatus
- 28 IC chip IF
- 40 printing paper
- 50 postprocessing unit
- 52 compile tray
- 54 stapler
- 56 cam
- 58 needle receiving base
- 280 antenna

~~図 5~~

FIG. 5

staple needle
(portion serving as an antenna)

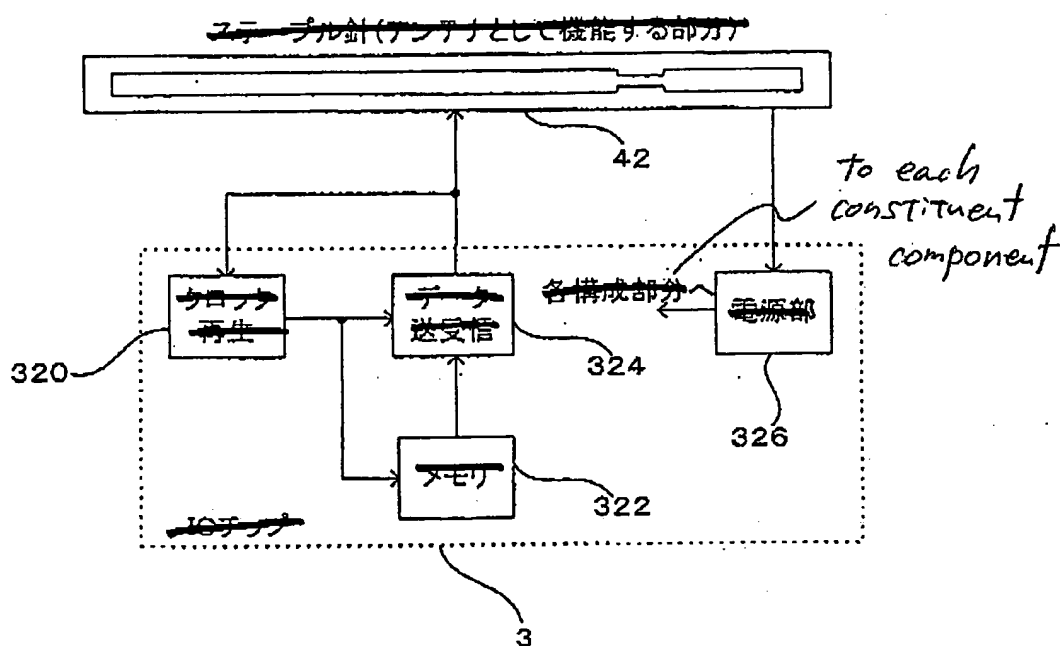


FIG. 5

320 clock reproduction

322 memory

324 data transmission/reception

326 power supply portion

FIG. 6


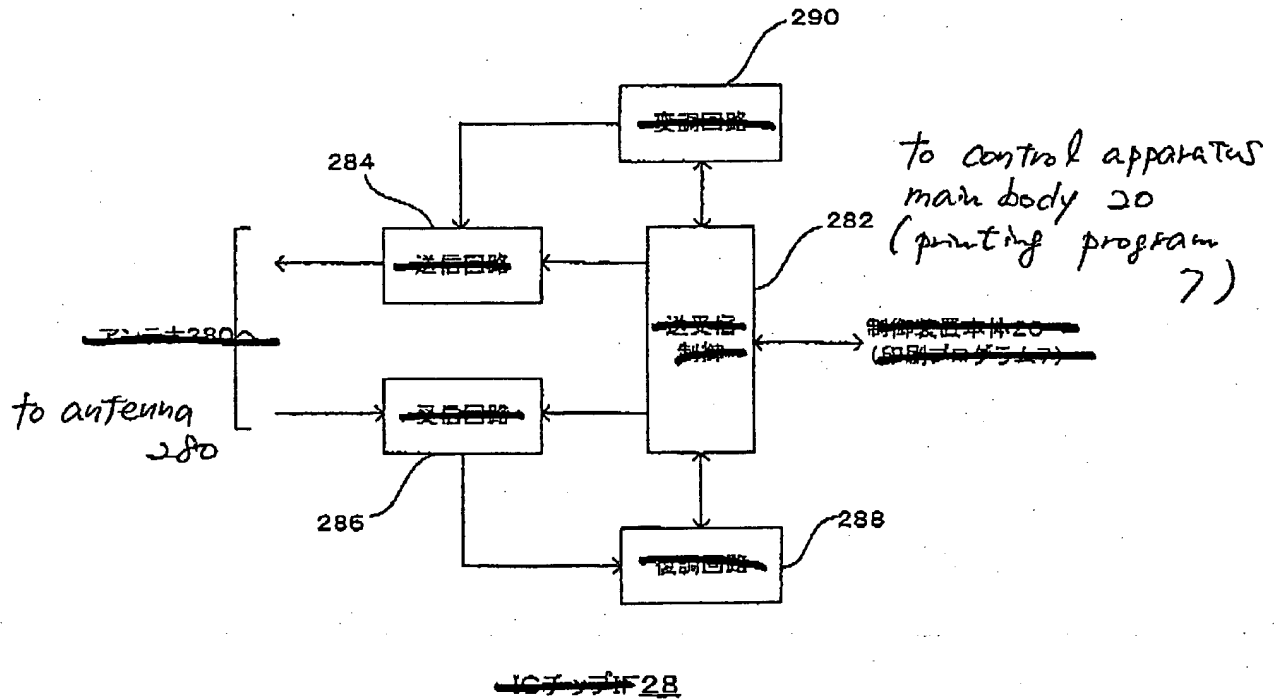


FIG. 6

28 IC chip IF
282 transmission/reception control
284 transmitting circuit
286 receiving circuit
288 demodulating circuit
290 modulating circuit

~~【図7】~~

FIG. 7

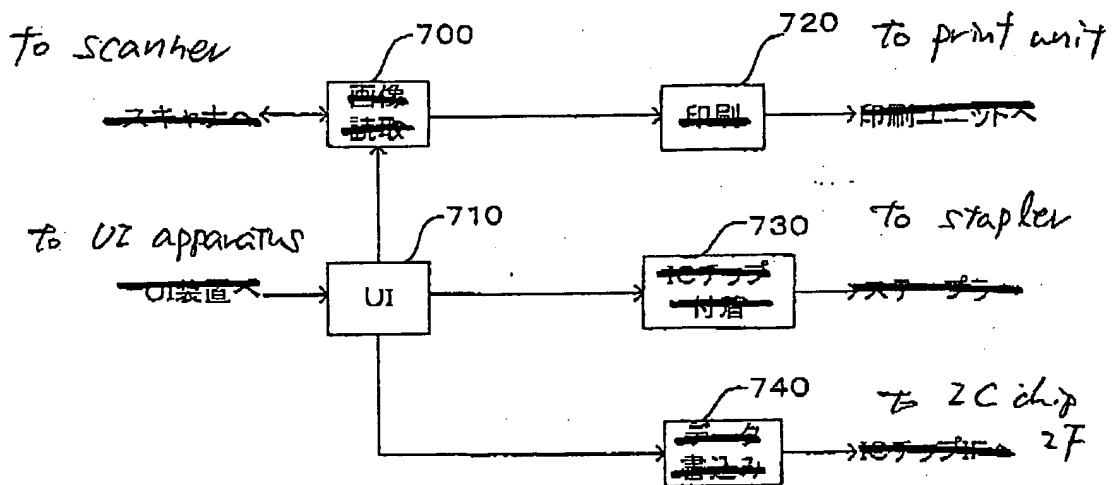

~~印刷プログラム2~~

FIG. 7


700 image reading

720 printing

730 IC chip attaching

740 data writing

FIG. 8

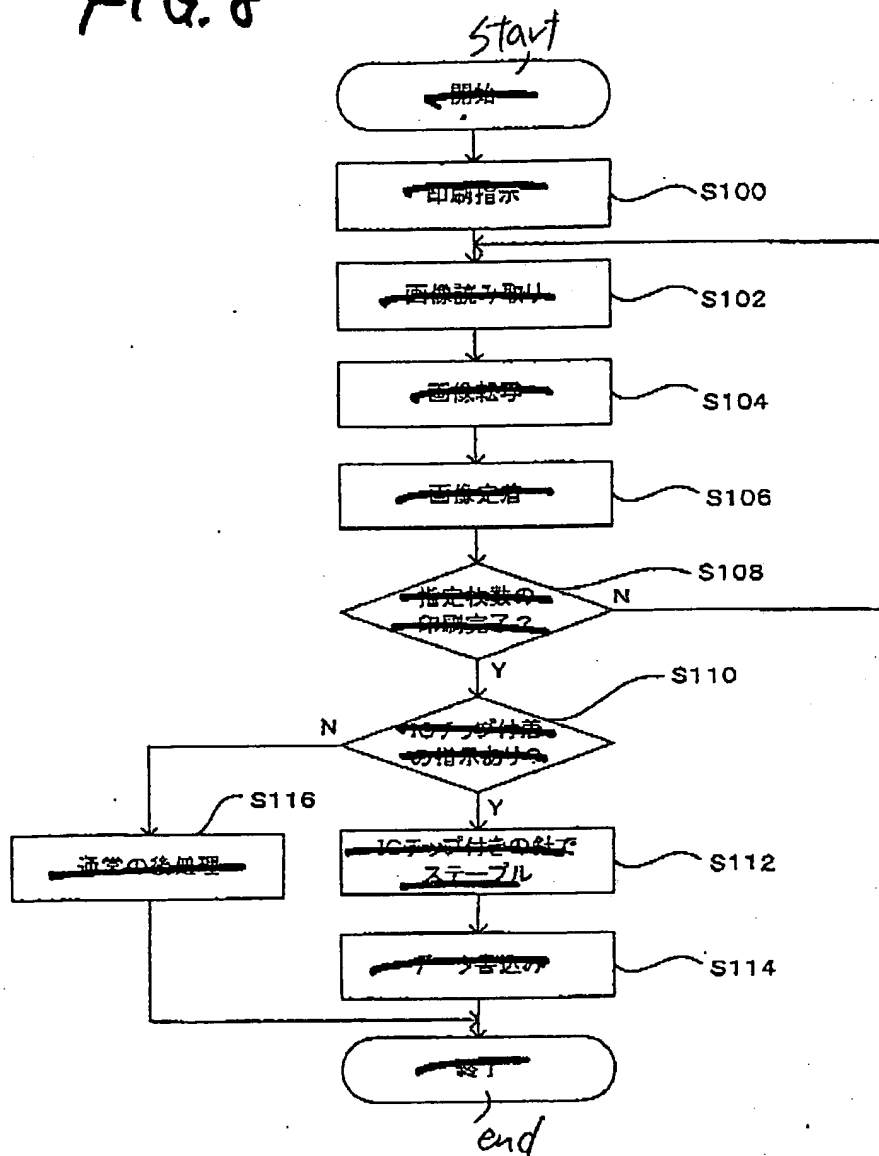

S10

FIG. 8

S100 print instruction

S102 read image

S104 transfer image

S106 fix image

S108 Has a designated sheet of printing operation been completed?

S110 Are there instruction for attaching IC chip?

S112 staple needle with IC chip

S114 write data

S116 normal postprocessing

~~図9~~

FIG. 9

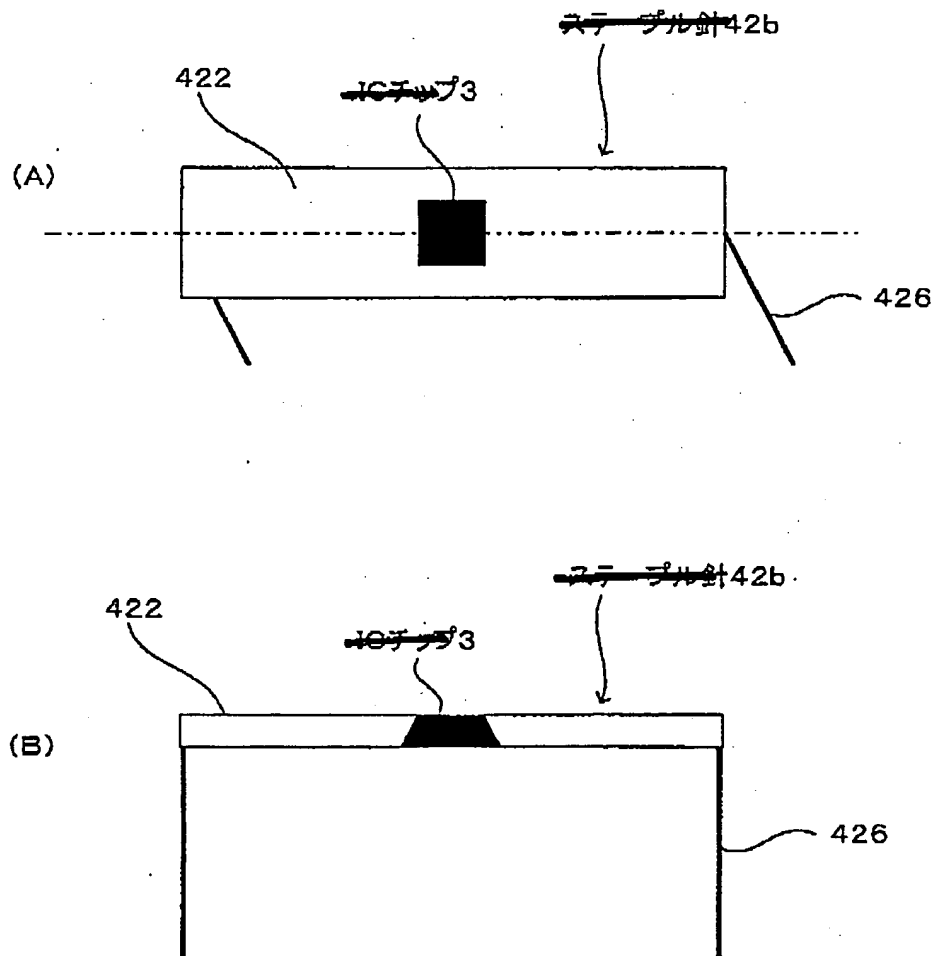


FIG. 9

(A)

3 IC chip

42b staple needle

(B)

3 IC chip

42b staple needle

~~【図10】~~

FIG. 10

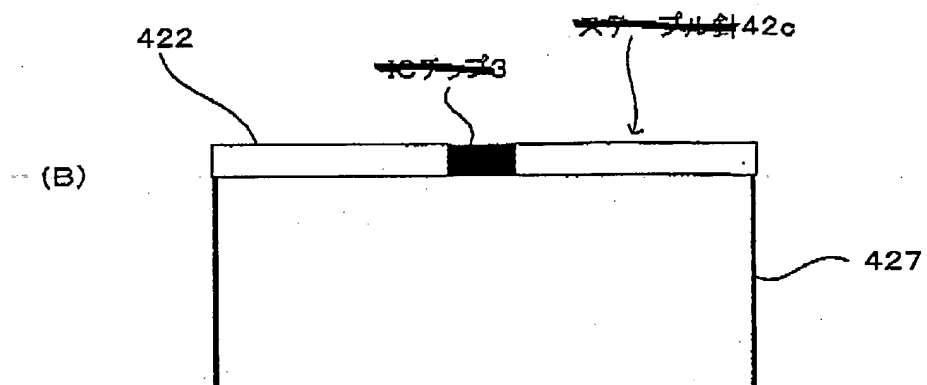
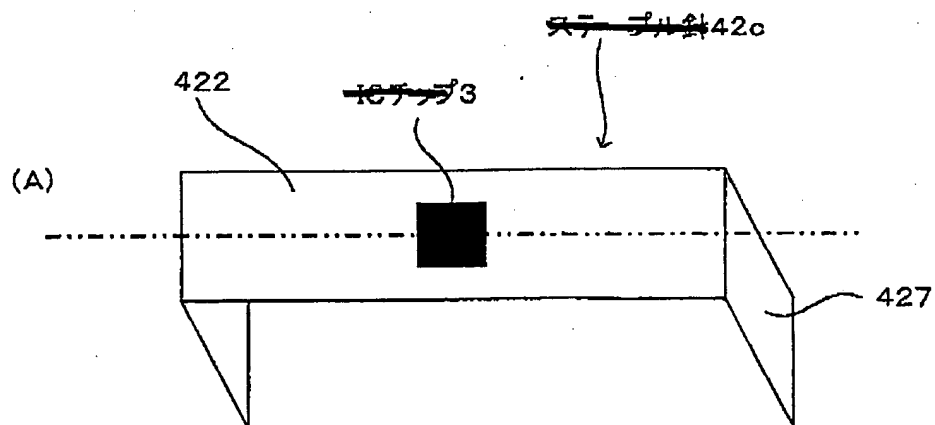


FIG. 10

(A)

3 IC chip

42c staple needle

(B)

3 IC chip

42c staple needle

~~FIG. 11~~

FIG. 11

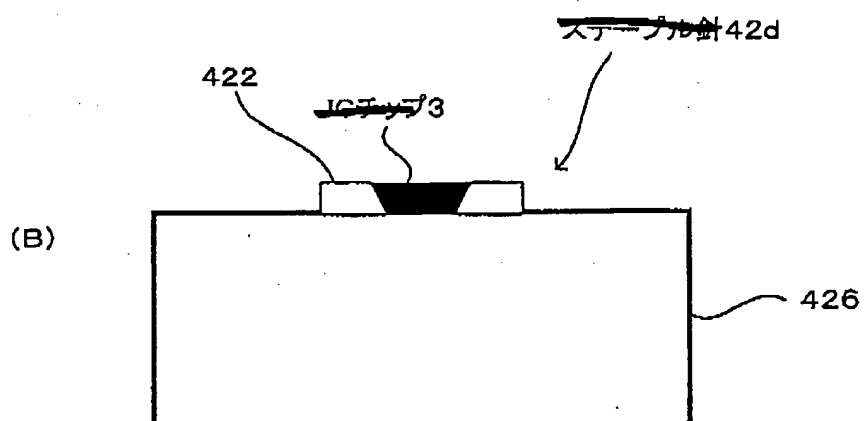
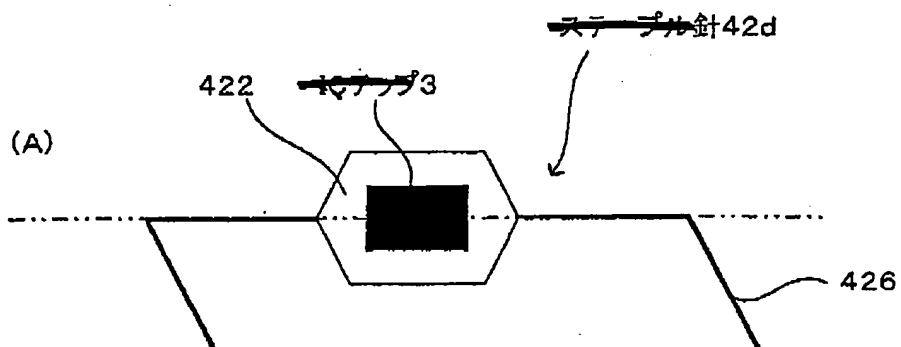


FIG. 11

(A)

3 IC chip

42d staple needle

(B)

3 IC chip

42d staple needle

~~【図12】~~

FIG. 12

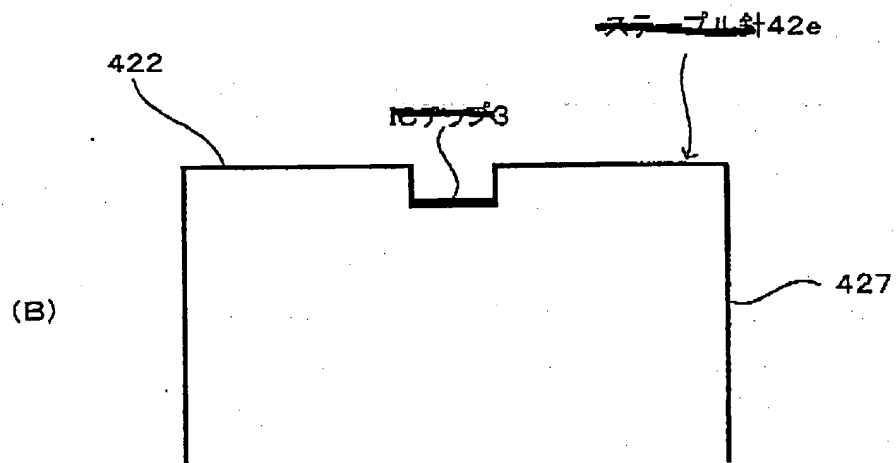
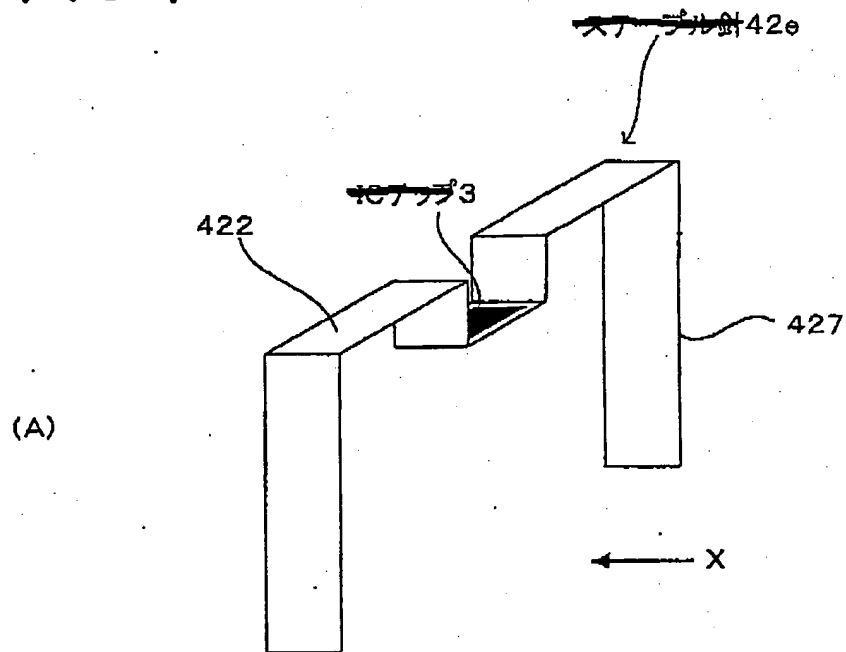


FIG. 12

(A)

3 IC chip

42e staple needle

(B)

3 IC chip

42e staple needle

FIG. 13

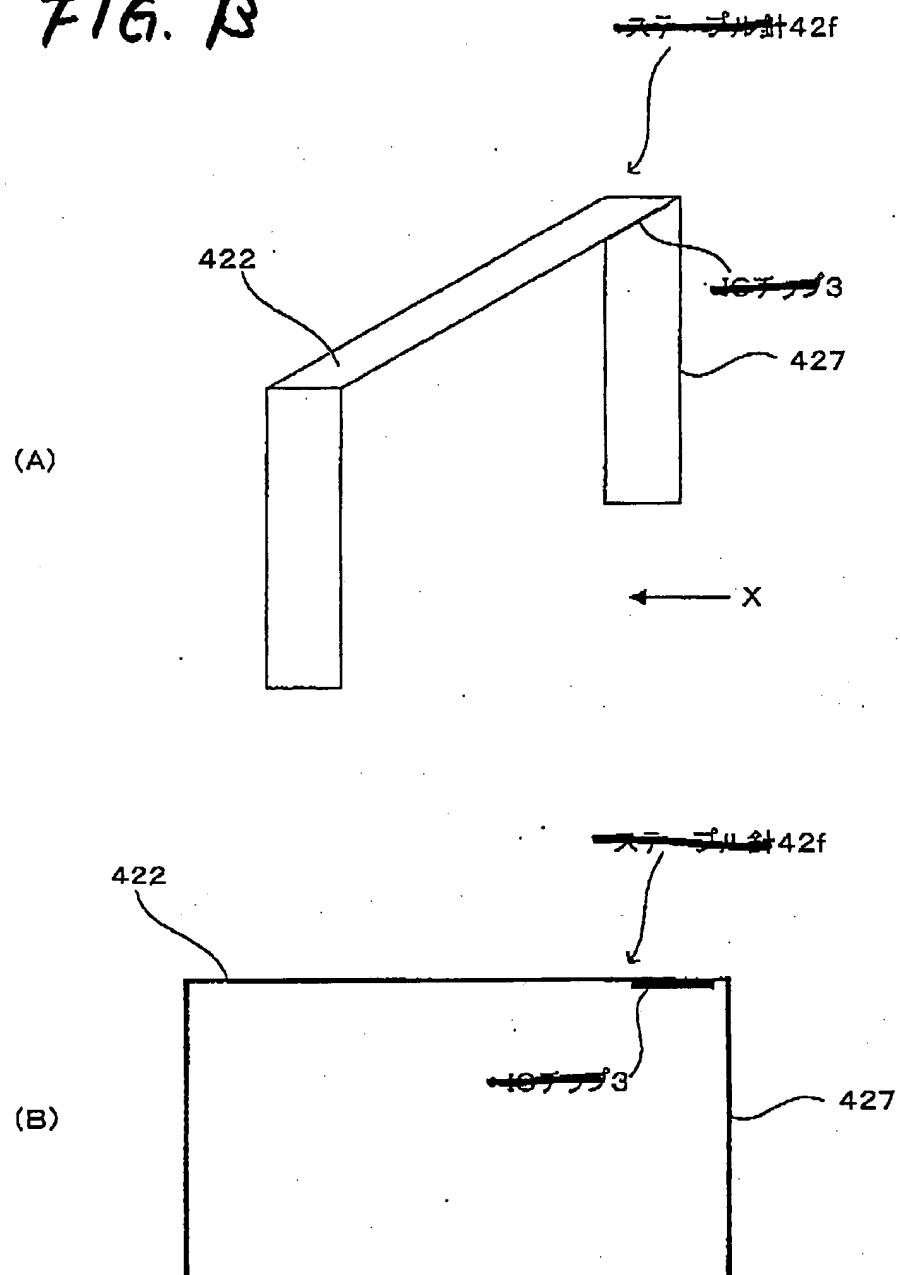


FIG. 13

(A)

3 IC chip

42f staple needle

(B)

3 IC chip

42f staple needle

~~【図14】~~

FIG. 14

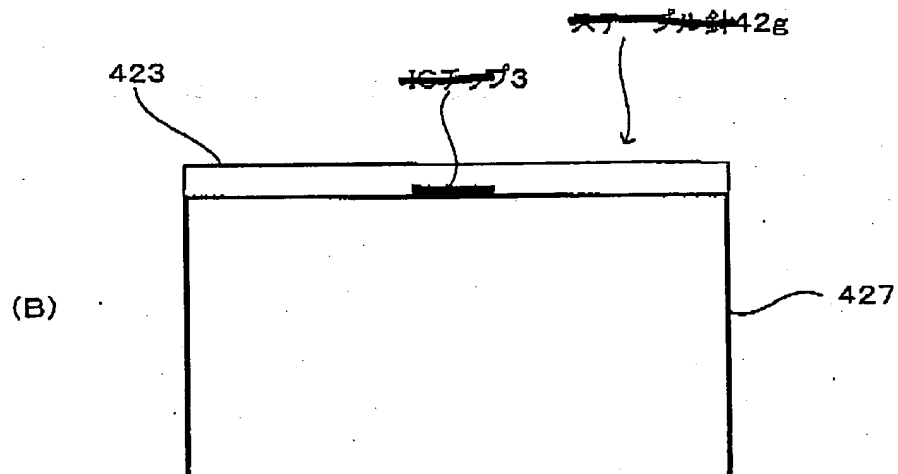
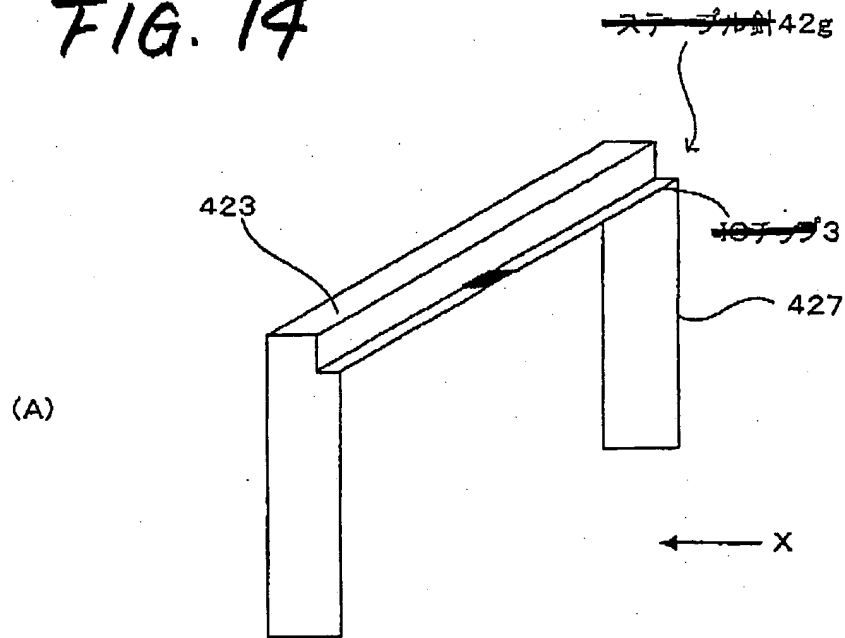


FIG. 14

(A)

3 IC chip

42g staple needle

(B)

3 IC chip

42g staple needle

FIG. 15

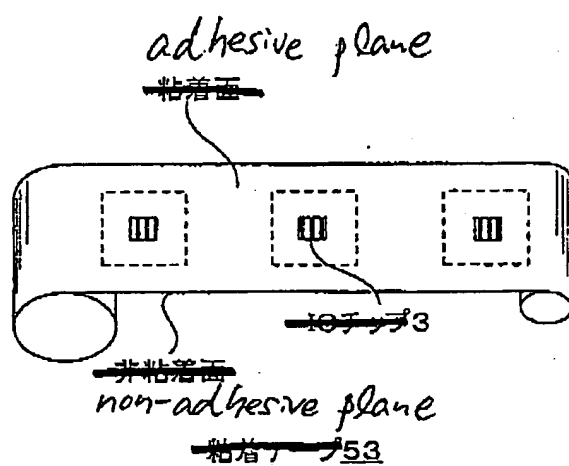


FIG. 15

3 IC chip

53 adhesive tape

FIG. 16

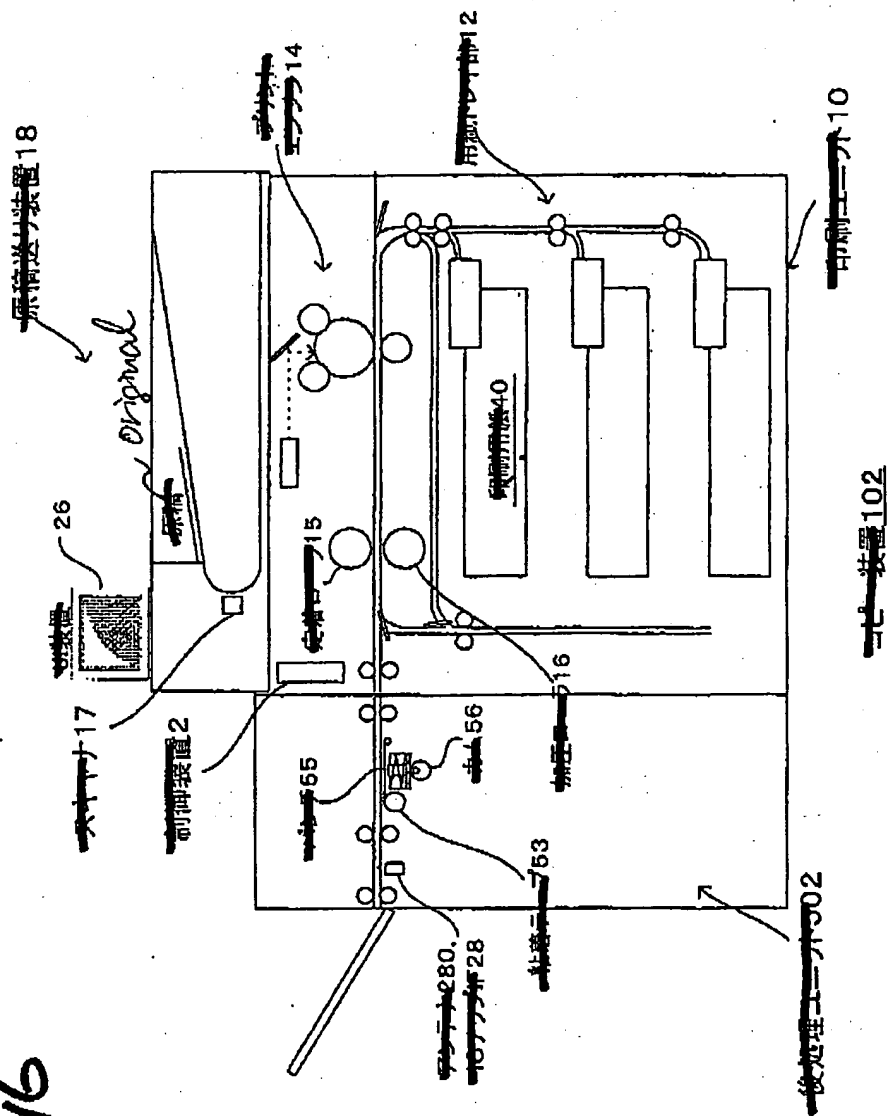


FIG. 16

- 2 control apparatus
- 10 print unit
- 12 paper tray part
- 14 print engine
- 15 fixing roller
- 16 pressure roller
- 17 scanner
- 18 original feeding apparatus
- 26 UI apparatus
- 28 IC chip IF
- 40 printing paper
- 53 adhesive tape
- 55 punch
- 56 cam
- 102 copying apparatus
- 280 antenna
- 502 postprocessing unit

FIG. 17

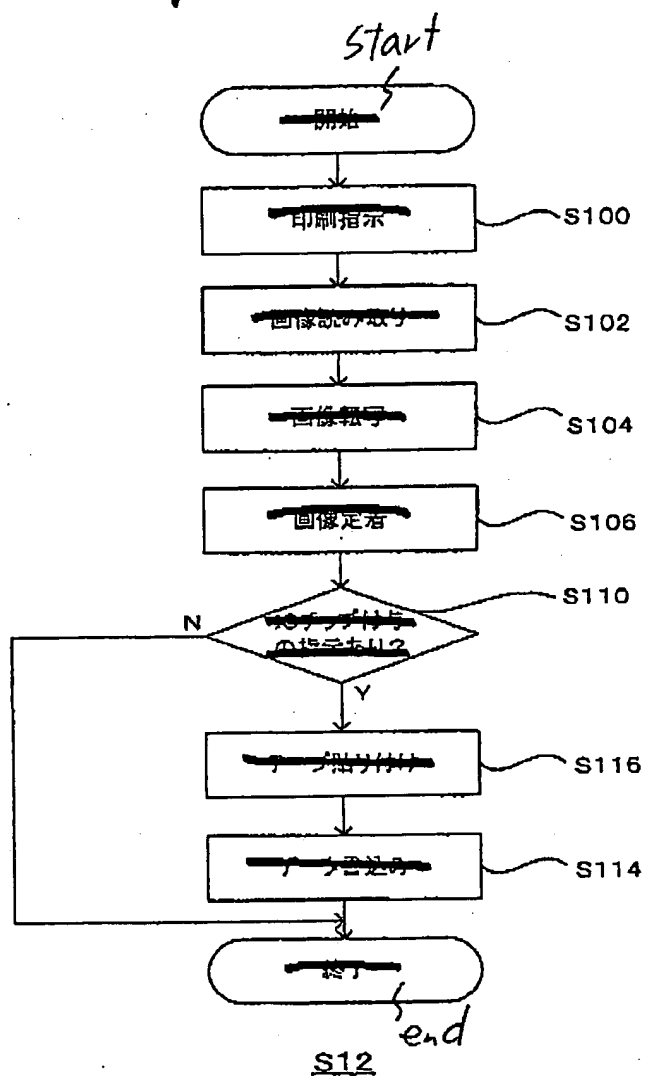


FIG. 17

S100 print instruction

S102 read image

S104 transfer image

S106 fix image

S110 Are there instruction for attaching IC chip?

S114 write data

S116 stick tape

FIG. 18

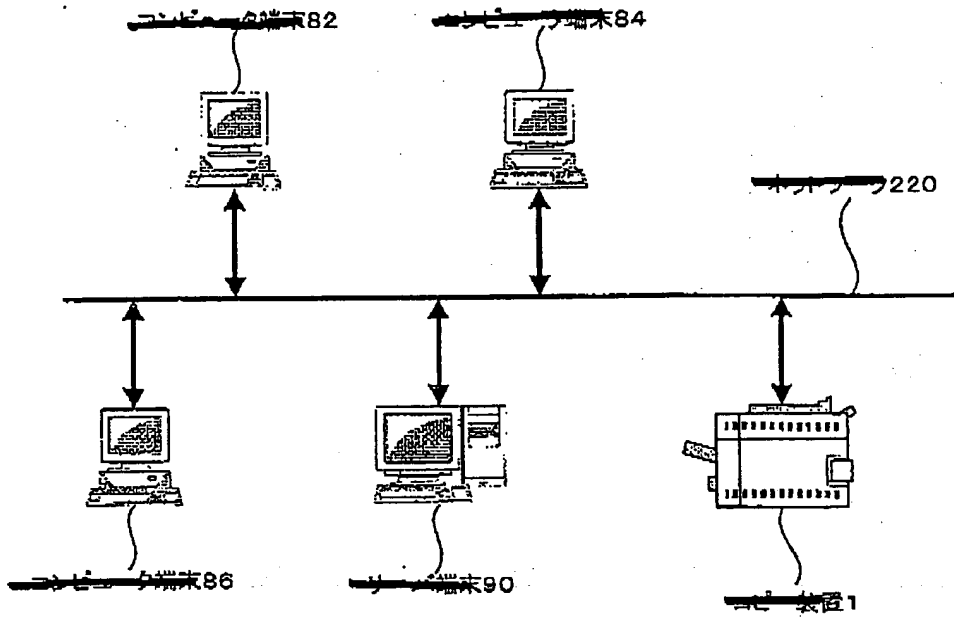


FIG. 18

1 copying apparatus
82, 84, 86 computer terminal
90 server terminal
220 network